

**>>RP-1705M/RP-1708M
>>RP-1705K/RP-1708K
5-P/8-P Fast Ethernet Switch**



The device provide a network with five or eight new and independent bandwidths speed Nway ports with TP. Every port provides a built-in Auto-negotiation function that automatically senses for the widest possible bandwidth (10Mbps - 200Mbps), then instantly sets the port to operate at that speed. In addition, each port provides its own independent bandwidth. This means users can instantly add 5/8 new bandwidths by simply attaching network cabling. This combination provides networks with the utmost in hardware flexibility. The device is a Plug-n-Play Switch, no confusing configuration is needed. The Switch offers a user friendly design with all status LEDs conveniently located on the front panel, and TP ports neatly placed along the back panel. To instantly add five/eight new bandwidths, or to upgrade the performance of any network.

Feature


- 5/8 ports Switched ports with Auto-negotiation function
- Full wire speed "Store-and-Forward" technology instantly eliminates bad packets
- Filtering/Forwarding Rate: 148,800 packets/sec. per port Max
- IEEE 802.3x Flow Control support for Full Duplex operation
- Back-Pressure support for Half Duplex operation
- IEEE 802.3u and 802.3 standards comply
- Plug-n-Play with easy to read diagnostic LEDs
- 5/8 ports Auto MDI-X detects and corrects crossover cables

Specification

Standards	<ul style="list-style-type: none"> • 100Base-TX, IEEE 802.3u • 10Base-T, IEEE 802.3
Interface	<ul style="list-style-type: none"> • 5 * 100Base-TX/10Base-T • 8 * 100Base-TX/10Base-T
Media Support	<ul style="list-style-type: none"> • 100Base-TX: Cat.5 TP • 10Base-T: Cat.3, 4 or 5 TP
Data Transfer Rate	<ul style="list-style-type: none"> • 100Base-TX/10Base-T: 200/100/20/10Mbps, via Auto-Negotiation
Forwarding / Filtering Rate	<ul style="list-style-type: none"> • 148810 packets/second per port @ 100Mbps, Max

	<ul style="list-style-type: none"> • 14880 packets/second per port @ 10Mbps, Max 			
Duplex Modes	<ul style="list-style-type: none"> • All ports support Half Duplex and Full Duplex operation 			
Auto MDIX	<ul style="list-style-type: none"> • All ports support Auto MDI-X which can detect and corrects crossover cables 			
LED Indicators	<ul style="list-style-type: none"> • One for Power On/Off • Per port for Link/Activity 			
Cabinet	RP-1705M	RP-1708M	RP-1705K/KB	RP-1708K/KB
	Metal	Metal	Plastic	Plastic
Power Supply	<ul style="list-style-type: none"> • External Power Adapter DC 9V 			
Environment	<ul style="list-style-type: none"> • Operating Temperature: 0°C~45°C • Operating Humidity: 10%~90% (Non-Condensing) 			
Dimension	RP-1705M	RP-1708M	RP-1705K/KB	RP-1708K/KB
	139 * 66 * 27	139 * 66 * 27	160 * 83 * 26	160 * 83 * 26
Certification	<ul style="list-style-type: none"> • FCC, CE 			

Specification

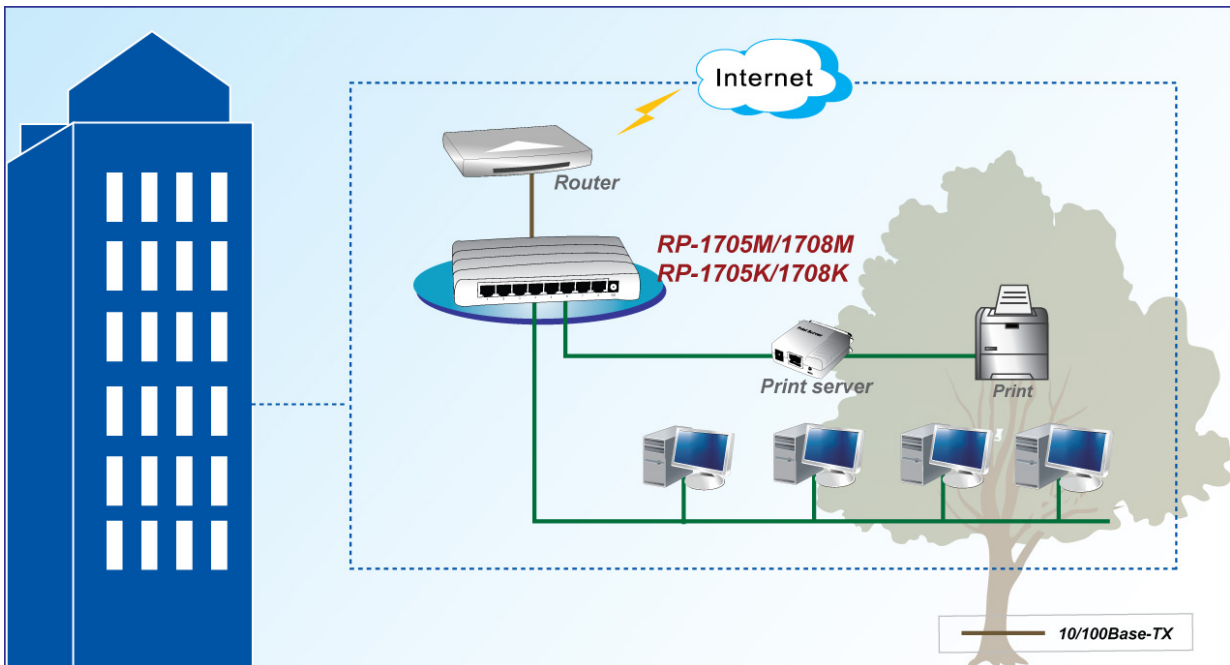

Ordering information

RP- 1705M	5-P Fast Ethernet Switch (Metal case)
RP- 1708M	8-P Fast Ethernet Switch (Metal case)
RP- 1705K	5-P Fast Ethernet Switch(Plastic case)
RP- 1708K	8-P Fast Ethernet Switch(Plastic case)